

OUTSTANDING RELIABILITY, IMPRESSIVE COLOR QUALITY, EFFICIENT DESIGN

The imageRUNNER ADVANCE C3500 Series is designed to deliver reliable color performance with a compact and efficient design. These intelligent systems work seamlessly with Canon's integrated software and services, making it an outstanding choice for small to medium-size businesses and departments within large organizations.

Print up to 30 ppm (BW/Color)

Scan up to 160 ipm (300 dpi) (BW, color, duplex)

Print up to 11" x 17", A3

2,300-sheet maximum paper capacity



Workflow Efficiency

- An intuitive user interface with a large, responsive, color touchscreen with smartphone-like usability helps make it easy to carry out tasks.
- My ADVANCE enables users to have a unique, customized experience that's tailored to their specific workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronized across multiple devices for consistency.
- Canon's MEAP platform supports a range of integrated solutions designed to help simplify workflow and achieve a holistic business solution.
- Scalable support for mobile and flexible work styles can help increase efficiency by allowing workers to capture or print documents and access certain cloud applications.¹
- Scan and convert documents to Searchable PDF, Microsoft® Word, and Microsoft PowerPoint® files through a single-pass, duplexing document feeder that holds up to 150 originals.
- Intelligent features, such as motion sensor technology to wake the device from Sleep mode and the ability to remove blank pages when scanning, can help maximize productivity.

Security²

- Control device access by using the standard Universal Login Manager application for authentication.
- Help limit unauthorized distribution of sensitive information with an array of standard and optional document security features.
- Help facilitate information privacy and security by controlling access with IPsec, port filtering capabilities, and SSL technology.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user can help reduce unnecessary printing, enable cost recovery, and help save money on paper and toner.
- Tight integration with a variety of output management solutions, such as optional uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis.

- Quality and reliability, combined with remote diagnostics, contribute to maximizing uptime and can help reduce time spent by IT to resolve issues.
- Consistent user operation, paired with remote and centralized fleet management, can help simplify IT management of a single device or a fleet of devices.

Device and Fleet Management

- The ability to preconfigure devices makes installation easy, and fleet management is simplified with the ability to synchronize settings across multiple compatible devices.
- Canon's device management tools provide a centralized point of control across a fleet of devices, including the ability to check device status and consumables, turn off devices remotely, capture meter readings, and manage address books and printer drivers.
- Standard genuine Adobe® PostScript® and PCL® support integration with enterprise applications and legacy systems to help streamline business processes.


Quality and Reliability

- Canon's signature reliability and engine technologies contribute to high-quality output to help meet the needs of busy departments.
- Outstanding imaging technologies and toner allow for consistently striking images using Canon's V² color profile and 1200-dpi print resolution.
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished, intuitive user maintenance videos, and automatic job rerouting (with optional solutions).

Sustainability

- Fusing technologies, pQ toner, and selectable Sleep mode settings help achieve low energy consumption.
- Help minimize waste with default two-sided printing, the Secure Print feature, and the ability to hold print jobs, preview them, and change print settings at the device so you can achieve the results you want the first time.
- ENERGY STAR® certified and rated EPEAT® Gold.³

Configuration

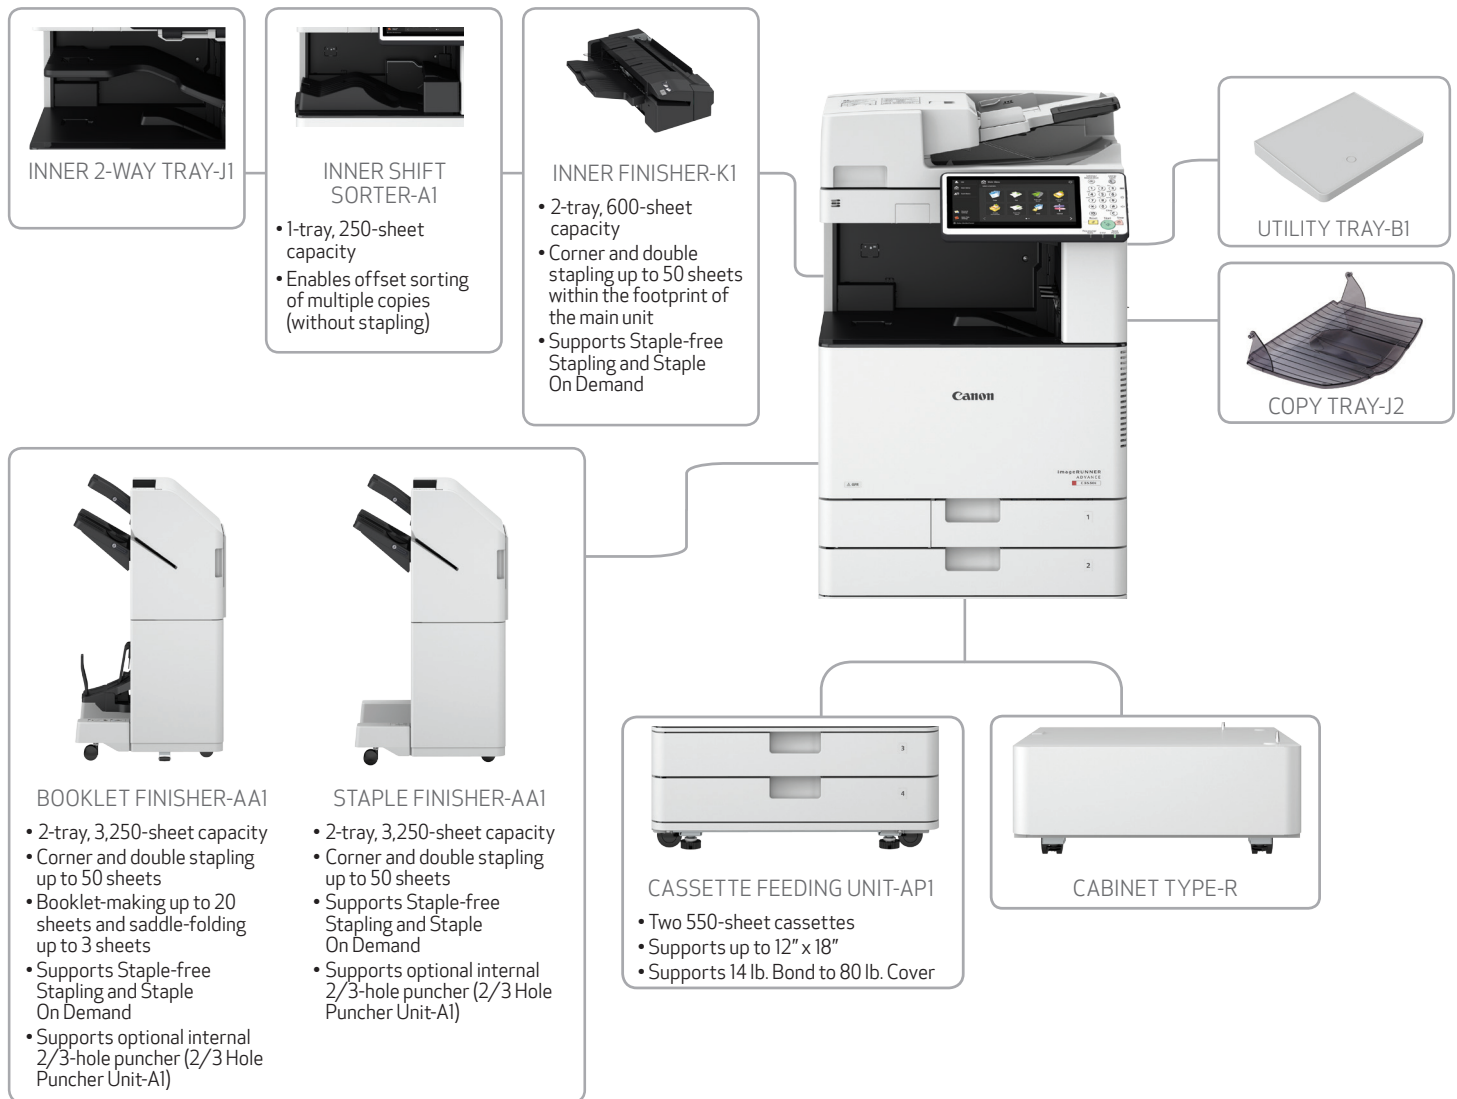

Main Unit

Type

Color Laser Multifunctional

Core Function

Print, Copy, Scan, Send, Store and Optional Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

25.6 cm (10.1 inch) TFT LCD WSVGA Color Touchpanel

Memory

Standard: 3.0GB RAM

Hard Disk Drive

Standard: 250GB

Interface Connection

Network

Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)

Optional: NFC, Bluetooth

Others

Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device)

Optional: Serial Interface, Copy Control Interface

Paper Capacity (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: 1,200 Sheets

Maximum: 2,300 Sheets

Paper Sources (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: Two 550-sheet Paper Cassettes

100-sheet Stack Bypass

Optional: Dual 550-sheet Paper Cassettes (CASSETTE FEEDING UNIT-AP1)

Maximum: 2,300 Sheets

Paper Output Capacity (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: 250 Sheets

Maximum: 3,450 Sheets (with External Finisher/Copy Tray)

Finishing Capabilities

Standard: Collate, Group
With Inner Finisher: Collate, Group, Offset, Staple, Staple-Free Staple, Staple On Demand

With External Finisher:

Collate, Group, Offset, Staple, Booklet**, Hole Punch*, Staple-Free Staple, Staple On Demand

*Necessary for 2/3 HOLE PUNCHER UNIT-A1, 2/4 HOLE PUNCHER UNIT-A1

**Necessary for BOOKLET FINISHER-AA1 only

Supported Media Types

Cassettes 1,2:

Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparency, Bond, Envelope

Multi Purpose Tray:

Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Coated, Envelope

Cassettes 3/4 (CASSETTE FEEDING UNIT-AP1): Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparency, Bond

Supported Media Sizes

Cassette1

Standard size: Letter, Executive, Statement-R, A4, B5, A5R

Envelopes: No.10 (COM10), ISO-C5, DL

Custom Size: 5-1/2" x 7-1/8" to 11-3/4" x 8-1/2" (139.7 mm x 182 mm to 297 mm x 215.9 mm)

Cassette 2

Standard size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, B5, A4R, A5R

Envelopes: No.10 (COM10), Monarch, DL

Custom Size: 5-1/2" x 7-1/8" to 12" x 18" (139.7 mm x 182 mm to 304.8 mm x 457.2 mm)

Cassette 3/4 (CASSETTE FEEDING UNIT-AP1)

Standard size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, A4R, B5R, B5, A5R

Custom Size: 5-1/2" x 7-1/8" to 12" x 18" (139.7 mm x 182 mm to 304.8 mm x 457.2 mm)

Stack Bypass:

Standard size: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement, Statement-R, A3, B4, A4, A4R, B5R, B5, A5, A5R, SRA3

Custom size: 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4 mm x 139.7 mm to 320 mm x 457.2 mm)

Free size: 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4 mm x 139.7 mm to 320 mm x 457.2 mm)

Envelopes: No.10 (COM10), Monarch, ISO-C5, DL

Envelope custom size: 3-7/8" x 3-7/8" to 12-5/8" x 18" (98 mm x 98 mm to 320 mm x 457.2 mm)

Supported Media Weights

Cassette1,2: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Cassette Feeding Unit: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Stack Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Duplex: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)

Warm-up Time

From Power On*: 34 Seconds or Less

*Time between device power-on and when the start key is enabled (print reservation) Quick startup Mode ON

From Deep Sleep Mode: 10 Seconds or Less

Quick Startup Mode: 10 Seconds or Less*

Dimensions (W x D x H)

22-1/4" x 29-1/4" x 35-1/2" (565 mm x 742 mm x 1148mm)⁵

Installation Space (W x D)

Basic: 38-1/2" x 44-1/4" (978 mm x 1,123 mm) (when attach with Stack Bypass open + Cassette Drawers open)⁵

Fully Configured: 63-3/4" x 44-1/4" (1,620 mm x 1,123 mm) (when attach with BOOKLET FINISHER-AA1 + Stack Bypass extension extended)⁶

Weight*

Approx. 213.9 lb. (97kg)⁷

Print Specifications

Printing Method

Color laser beam printing

Print Speed

iR-ADV C3530i 30 ppm (Letter/A4)
15 ppm (Legal/11" x 17"/A3)

iR-ADV C3525i 25 ppm (Letter/A4)
15 ppm (Legal/11" x 17"/A3)

Print Resolution
Engine resolution: 600dpi×600dpi, 1200dpi×1200dpi
Laser resolution: 9600dpi equivalent×600dpi (600dpi mode)/1200dpi×1200dpi(1200dpi mode)

Page Description Languages

UFR II, PCL®6, Adobe® PS® 3
Double Sided Printing

Automatic (Standard)

Direct Print

Direct printing available from USB memory key, Advanced box, Remote UI and Web Access⁵
Supported File Types: PDF, TIFF, JPEG, EPS, XPS

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT
J/K/S/1* [Japanese, Korean, Simplified and Traditional Chinese]⁹, Barcode Fonts¹⁰
PS fonts: 136 Roman

Operating System¹¹

UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7 or later)
PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016
PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10/Server 2016, MAC OS X (10.7 or later)
PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 8.1/Windows 10

Copy Specifications

Copy Speed

iR-ADV C3530i: 30 ppm (Letter/A4), 15 ppm (Legal/11" x 17"/A3)
iR-ADV C3525i: 25 ppm (Letter/A4), 15 ppm (Legal/11" x 17"/A3)

First-Copy-Out Time* (LTR, A4) (BW/CL)

Approx. 5.9/8.2 seconds or less
*20 °C to 30 °C Environment

Copy Resolution

Reading: 600 dpi x 600 dpi

Multiple Copies

Up to 999 copies

Copy Exposure

Automatic or Manual (inch: 9 Levels, A/B: 11 Levels)

Magnification

25% - 400% (1% Increments)

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Tranceparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Cascade Copy, Copy ID Card, Detect Feeder Multi Sheet Feed. Free Size Original

Scan Specifications

Type

Single-pass Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

150 Sheets (20 lb. Bond, 80 g/m²)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, A3, B4, A4, A4R, B5, B5R, A5, A5R, B6R

Document Feeder Supported Media Weights

Single-sided scanning: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²) (BW, inch)
10 lb. Bond to 58 lb. Cover (38 to 157 g/m²) (BW, A/B)
Single-sided scanning: 17 lb. Bond to 58 lb. Cover (64 to 157 g/m²) (CL, inch and A/B)
Double-sided scanning: 13 lb. Bond to 58 lb. Cover (50 to 157 g/m²) (BW, inch and A/B)
Double-sided scanning: 17 lb. Bond to 58 lb. Cover (64 to 157 g/m²) (CL, inch and A/B)

Pull Scan Spec

Color Network ScanGear2. For both Twain and WIA

Supported OS: Windows Vista/7/8/8.1/10
Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2

Scan Resolution

Max. 600 x 600 dpi
Min. 100 x 100 dpi

Platen Acceptable Originals

Platen: Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2kg)]
Feeder size: 11" x 17", Legal, Letter, Letter-R, Statement, A3, A4, A4R, A5, A5R, B4, B5, B5R, B6

Scan Speed (LTR, A4)

Single-sided Scanning (BW): 80 ipm (300pi)
Single-sided Scanning (Color): 80 ipm (300pi)
Double-sided Scanning (BW): 160 ipm (300pi)
Double-sided Scanning (Color): 160 ipm (300pi)

Send Specifications

Destination

E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 FAX(Optional), IP Fax(Optional)

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution

Max. 600 x 600 dpi
Min. 100 x 100 dpi

Communication Protocol

File: FTP, SMB v3.0, WebDAV
E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF(Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b), XPS(Searchable, Compact), Office Open XML (PowerPoint, Word)
Optional: PDF(Trace&Smooth, Encrypted), PDF/XPS(Digital Signature)

Fax Specifications

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 kbps
G3: 14.4 kbps

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

11" x 17", Legal, Letter, Statement-R, A3, B4, A4, A4R, B5, B5R, A5*, A5R*
*sent as A4

FAX Memory

Up to 30,000 pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 dials

Sequential Broadcast

Max. 256 addresses

Memory Backup

Yes

Store Specifications

Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes
30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV
Supported Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space

Approx. 16GB (Standard HDD)

Memory Media

Standard: USB Memory

Security Specifications

Authentication

Standard: Picture Login Authentication, DepartmentID Authentication, (Device and Function Level Log-in), Access Management System
Optional: My Print Anywhere secure print (Requires uniFLOW)

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated)
Optional: Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Document

Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration
Optional: Encrypted PDF, User and Device signatures, Secure Watermarks, Document Scan locking

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C (50 to 86 °F)
Humidity: 20 to 80 % RH (no condensation)

Power Requirements

120-127V, 60Hz, 7.5A
220-240V, 50/60Hz, 4.0A

Plug (Main Unit)

NEMA 5-15P (120V)
CEE7/7 (230V)

Power Consumption

Maximum: 1.5 kW
Standby: Approx. 41.2 Wh *
*Reference Value
Sleep mode: Approx. 0.8 W¹²

Typical Electricity Consumption (TEC) rating
iR-ADV C3530i: 1.2 kWh (120V/230V)
iR-ADV C3525i: 1.0kWh (120V), 0.9 kWh (230V)

Standards

ENERGY STAR® Qualified
Rated EPEAT® Gold³

Consumables

Toner

GPR-53 TONER BK/C/M/Y¹³

Toner Yield (Estimated @5% Coverage)

GPR-53 Black Toner 36,000impressions
GPR-53 C/M/Y Toner 19,000 impressions

GPR-53L C/M/Y Toner 8,500 impressions

Software and Printer Management

Remote management tools

iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)
eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)
Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control.

Scanning software

Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device.

Optimisation tools

Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers (Available via service only)
NetSpot Device Installer: Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.

Platform

MEAP (Multifunctional Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device.
MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services

Document Publishing

IW Desktop: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorization.

Paper Supply Options

CASSETTE FEEDING UNIT-A1

Paper Capacity: 550 Sheets x 2 Cassettes (20lb. Bond (80 g/m²))
Paper Size: 12"x18", 11"x17", Legal, Letter, Letter-R, Executive, Statement-R, A3, B4, A4, A4R, B5R, B5, A5R, and Custom Size 5-1/2" x 7-1/8" to 12" x 18" (139.7 x 182.0 to 304.8 x 457.2 mm)
Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m²)
Power Source: From the Main Unit
Dimensions* (W x D x H): 22-1/4" x 24-1/4" x 9-3/4" (565 mm x 615 mm x 248 mm)
*When attached with the Main Unit
Weight: Approx. 35.3 lb. (16 kg)

Output options

INNER 2WAY TRAY-J1

Number of Trays : 2
Total Output Capacity: Upper Tray 100 sheets
Lower Tray 250 sheets
Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)
Paper Size: 12"x18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement, Statement-R, A3, B4R, A4, B5, A5, A4R, B5R, A5R, and Custom Size: 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4mm×139.7mm~320mm×457.2mm)
Free Size: 3-7/8" x 5-1/2" to 12-5/8" x 18" (98.4mm x 139.7mm~320mm×457.2mm)

Envelope (No.10 (COM10), Monarch, DL, ISO-C5), Envelope custom size: 3-7/8" x 3-7/8" to 12-5/8" x 18" (98.0mm x 98.0mm ~ 320mm x 457.2mm)

Dimensions* (W x D x H): 16-7/8" x 16" x 3" (427 mm x 407 mm x 76 mm)

Weight: *When attached with the Main Unit Approx. 1.3 lb (0.6 kg)

INNER SHIFT SORTER-A1

Number of Trays: 1

Total Output Capacity: Letter/Executive/A4/B5: 250 sheets 12"x18"/11"x17"/Legal/Letter-R/Statement/Statement-R/A3/B4/R/A4/R/A5/A5R/B5R: 125 sheets

Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Dimensions* (W x D x H): 21-1/4" x 20-5/8" x 4-1/2" (538 mm x 523 mm x 114 mm)

Weight: *When the extension tray is extended Approx. 6.6 lb (3.0 kg)

INNER FINISHER-K1

Number of Trays: 2

Top Tray Capacity: Letter, Statement, Statement-R, Executive, A4, B5, A5, A5R 100 sheets, 12"x18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 50 sheets

Lower Tray Capacity: Letter, Statement, Statement-R, Executive, A4, B5, A5, A5R 500 sheets, 12"x18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 250 sheets

Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Staple Position: Corner, Double

Staple Capacity: Corner staple and Double Staple: Letter/Executive/A4/B5: 50 sheets (14 to 24 lb. Bond (52 to 90 g/m²)) 11" x 17"/Legal/Letter-R/A3/B4/A4R: 30 sheets (14 to 24 lb. Bond (52 to 90 g/m²)) Staple-Free Staple: 11"x17"/Letter/A3/A4/B4/B5: 5 sheets (14 to 17 lb. Bond (52 to 64 g/m²)) 4 sheets (17.3 to 21.7 lb Bond (65 to 81.4 g/m²)) 3 sheets (21.7 to 28 lb Bond (81.5 to 105 g/m²)) Staple On Demand: 40 sheets (20 lb. Bond (80 g/m²)) From the Main Unit 23-3/4" x 20-5/8" x 7-3/8" (604 mm x 525 mm x 188 mm)

Power Source: Dimensions* (W x D x H): *When the extension tray is extended Approx. 17.6 lb (8 kg)

STAPLE FINISHER-AA1 (External)

Number of Trays: 2

Top Tray Capacity: Letter, Executive, Statement, Statement-R, A4, B5, A5, A5R 250 sheets, 12" x 18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 125 sheets

Lower Tray Capacity: Letter, Executive, Statement, Statement-R, A4, B5, A5, A5R 3,000 sheets, 12" x 18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 1,500 sheets

Paper Weight: Top Tray 14 lb. Bond to 80 lb. Cover (52 to 256 g/m²) Lower Tray 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Staple Position: Corner, Double

Staple Capacity: Corner staple and Double Staple: Letter/Executive/A4/B5: 50 sheets (14 lb. Bond to 24 lb. Cover (52 to 90 gsm)) 11" x 17"/Legal/Letter-R/A3/B4/A4R: 30 sheets (14 lb. Bond to 24 lb. Cover (52 to 90 gsm)) Staple-Free Staple: 11"x17"/Letter/A3/A4: 5 sheets (14 to 17 lb. Bond (52 to 64 g/m²)) 4 sheets (17.3 to 21.7 lb Bond (65 to 81.4 g/m²)) 3 sheets (21.7 to 28 lb Bond (81.5 to 105 g/m²))

Power Source: Dimensions* (W x D x H): Staple On Demand: 50 sheets (24 lb. Bond (90 g/m²)) From the Main Unit 25-1/8" x 24-1/2" x 40" (637 mm x 623 mm x 1,016 mm)

BOOKLET FINISHER-AA1 (External)

Weight: 2

Number of Trays: Letter, Executive, Statement, Statement-R, A4, B5, A5, A5R 250 sheets, 12" x 18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 125 sheets

Lower Tray Capacity: Letter, Executive, Statement, Statement-R, A4, B5, A5, A5R 3,000 sheets, 12" x 18", 11" x 17", Legal, Letter-R, A3, B4, A4R, B5R, SRA3 1,500 sheets

Paper Weight: Top Tray 14 lb. Bond to 80 lb. Cover (52 to 256 g/m²) Lower Tray 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Staple Position: Corner, Double

Staple Capacity: Corner staple and Double Staple: Letter/Executive/A4/B5: 50 sheets (14 lb. Bond to 24 lb. Cover (52 to 90 gsm)) 11" x 17"/Legal/Letter-R/A3/B4/A4R: 30 sheets (14 lb. Bond to 24 lb. Cover (52 to 90 gsm)) Staple-Free Staple: 11"x17"/Letter/A3/A4: 5 sheets (14 to 17 lb. Bond (52 to 64 g/m²)) 4 sheets (17.3 to 21.7 lb Bond (65 to 81.4 g/m²)) 3 sheets (21.7 to 28 lb Bond (81.5 to 105 g/m²)) Staple On Demand: 50 sheets (24 lb. Bond (90 g/m²)) 12" x 18", 11" x 17", Legal, Letter-R, A3, B4, A4R, Custom Size 7-3/4" x 10-5/8" to 12" x 18" (195 mm x 270 mm to 304.8 mm x 457.2 mm)

Booklet Stitch paper size: 20 sheets x 10 sets (22 lb. Bond (81 g/m²)) (Including 1 cover sheet up to 140 lb. index (256 g/m²))

Booklet Stitch Staple Capacity: From the Main Unit 25-1/8" x 24-1/2" x 40" (637 mm x 623 mm x 1,016 mm)

Power Source: Dimensions* (W x D x H): *When the extension tray is extended Approx. 116.8 lb (53 kg)

2/3 HOLE PUNCHER UNIT-A1

Two or Three Holes

*Requires either the STAPLE FINISHER-AA1 or BOOKLET FINISHER-AA1

Acceptable Punch Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Acceptable Punch Paper Size: Two holes 11" x 17", Legal, Letter, Letter-R, Executive, A3, B4R, A4, A4R, B5, B5R Three holes 11" x 17", Letter, Executive, A3, B4R, A4, B5 From the Main Unit

2/4 HOLE PUNCHER UNIT-A1

Two or Four Holes

*Requires either the STAPLE FINISHER-AA1 or BOOKLET FINISHER-AA1

Acceptable Punch Paper Weight: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)

Acceptable Punch Paper Size: Two holes 11" x 17", Legal, Letter, Letter-R, Executive, A3, B4R, A4, A4R, B5, B5R Four holes 11" x 17", Letter, Executive, A3, A4 From the Main Unit

Power Source:

Hardware Accessories

Card Readers

Micard Plus Proximity Card Reader

Copy Card Reader-F1

Copy Card Reader Attachment-B5

Others

Utility Tray-B1

Security Options

Document Security

Document Scan Lock Kit-B1

Secure Watermark-B1

Data Security

Removable HDD Kit-AK2

System and Controller options

Print Accessories

PCL International Font Set-A1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Web Access Software-K1

Serial Interface Kit-K3

FAX Accessories

Super G3 Fax Board-AU1

Super G3 2nd Line Fax Board-AU1

Remote Fax Kit-A1

IP Fax Expansion Kit-B1

Other Options

Accessibility Accessories

ADF Access Handle-A1

Consumables

Stamp Ink Cartridge-C1

Stamp Unit-B1

Staple-P1

Staple Cartridge-Y1

Footnotes

- ¹ Subscription to a third-party cloud service required. Subject to third-party cloud service providers' terms and conditions.
- ² Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance.
- ³ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net/ 120V only
- ⁴ Time from device power-on to when copy jobs can be programmed.
- ⁵ Includes main unit and either Cassette Feeding Unit-AP1, or Cabinet Type-R.
- ⁶ Includes main unit and either Cassette Feeding Unit-AP1 or Cabinet Type-R and Staple/Booklet Finisher-AA1.
- ⁷ Includes main unit, ADF consumables, and Cassette Feeding Unit-API.
- ⁸ PDF print from Web sites is supported.
- ⁹ Requires the optional PCL International Font Set-A1.
- ¹⁰ Requires the optional Barcode Reader Kit-D1.
- ¹¹ Other operating systems and environments, including AS/400, UNIX, Linux and Citrix, may be supported. Some solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹² 0.8 W sleep mode not available in all circumstances due to certain settings.
- ¹³ GPR-53L Toner also available for Color (C, M, Y). Yield (estimated @ 5% coverage) is 8,500 images.

Canon

Canon U.S.A., Inc. - Latin America Group
One Canon Park
Melville, NY 11747
U.S.A.

www.cla.canon.com/imageRUNNER_ADV_Series



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Google Cloud Print™ is either a registered trademark or trademark of Google Inc. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, MEAP, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. iF Design Award 2017 is for third generation imageRUNNER ADVANCE Multifunction office systems. uniFLOW is a registered trademark of NT-ware Systemprogrammierung GmbH. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors. ©2017 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

