



 **imageRUNNER**
ADVANCE
C355iF / C255iF



SPACE-SAVING DESIGN, INTUITIVE USABILITY, RELIABLE PERFORMANCE

The imageRUNNER ADVANCE C355iF/C255iF models are designed to deliver consistent, reliable performance with advanced capabilities in a compact design. These intelligent systems offer an intuitive user experience, work seamlessly within fleet environments, and support Canon's holistic business solutions to help address your needs.

Print up to 36 ppm (BW/Color)

Scan up to 100 ipm (300 dpi) (BW, color, duplex)

Print up to 8-1/2" x 14", A4

2,300-sheet maximum paper capacity



Workflow Efficiency

- An intuitive user interface with a large, responsive color touchscreen with smartphone-like usability helps make it easy to carry out tasks.
- My ADVANCE enables users to have a unique, customized experience that's tailored to their specific workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronized across multiple devices for consistency.
- Canon's MEAP platform supports a range of integrated solutions designed to simplify workflow and achieve a holistic business solution.
- Scalable support for mobile and flexible work styles can help increase efficiency by allowing workers to capture or print documents and access certain cloud applications.¹
- Scan and convert documents to Searchable PDF, Microsoft® Word, and Microsoft® PowerPoint® files through a single-pass, duplexing document feeder that holds up to 100 originals.
- Intelligent features, such as motion sensor technology to wake the device from Sleep mode and the ability to remove blank pages when scanning can help maximize productivity.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user can help reduce unnecessary printing, enable cost recovery, and help save money on paper and toner.
- Tight integration with output management solutions, such as optional uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis.
- Quality and reliability, combined with remote diagnostics, contribute to maximizing uptime and can help reduce time spent by IT to resolve issues.
- Consistent user operation, combined with remote and centralized fleet management, can help simplify IT management of a single device or a fleet of devices.

Security²

- Control device access by using the standard Universal Login Manager application for authentication.

- Help limit unauthorized distribution of sensitive information with an array of standard and optional document security features.
- Help facilitate information privacy and security by controlling access with IPsec, port filtering capabilities, and SSL technology.

Device and Fleet Management

- The ability to pre-configure devices makes installation easy, and fleet management is simplified with the ability to synchronize settings across multiple compatible devices.
- Canon's device management tools provide a centralized point of control across a fleet of devices, including the ability to check device status and consumables, turn off devices remotely, capture meter readings, and manage address books and printer drivers.
- Standard genuine Adobe® PostScript® and PCL® support integration with enterprise applications and legacy systems to help streamline business processes.


Quality and Reliability

- Canon's signature reliability and engine technologies contribute to high-quality output to help meet the needs of busy departments.
- Outstanding imaging technologies and toner allow for consistently striking images using Canon's V² color profile and 1200-dpi print resolution.
- Designed to achieve maximum uptime with status notifications to help keep supplies replenished, intuitive user maintenance videos, and automatic job rerouting (with optional solutions).

Sustainability

- Fusing technologies, pQ toner, and innovative Sleep mode features help lower overall energy consumption.
- Help minimize waste with default two-sided printing, the Secure Print feature, and the ability to hold print jobs, preview them, and change print settings at the device, so you can achieve the results you want the first time.
- ENERGY STAR® certified and rated EPEAT® Gold.³

Configuration

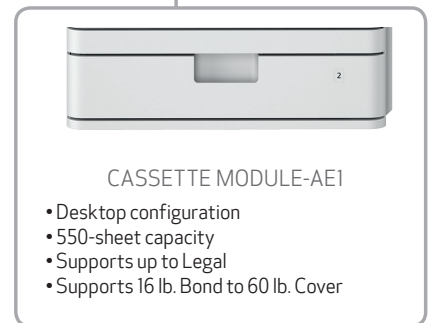

Main Unit

Type

Color Laser Multifunctional

Core Function

Print, Copy, Scan, Send, Store, Fax

Processor

Canon Dual Custom Processor (Shared)

Control Panel

25.6 cm/ 10.1 inch TFT LCD WSVGA Color Touchpanel

Memory

Standard: 3.0GB RAM

Hard Disk Drive

250GB

Interface Connection

Network

Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)

Optional: NFC, Bluetooth

Others

Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device),

Optional: Serial Interface, Copy Control Interface

Paper Capacity (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: 650 Sheets

Maximum: 2,300 Sheets

Paper Sources (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: 550-sheet Paper Cassette

100-sheet Stack bypass

Optional: 550-sheet Paper Cassette (Cassette Feeding Unit-AJ1)

550-sheet Paper Cassette (Cassette Module-AE1)

550-sheet x 3 Paper Cassettes (Cassette Feeding Unit-AK1)

Maximum: 2,300 Sheets

Paper Output Capacity (A4, 80 g/m²) (LTR, 20 lb. Bond)

Standard: 250 Sheets

Maximum: 500 Sheets (with External Finisher*)

*STAPLE FINISHER-Z1

Finishing Capabilities

Standard: Collate, Group

With External Collate, Group, Offset, Staple

Finisher*: *Necessary for STAPLE FINISHER-Z1

Supported Media Types

Cassette 1: Thin, Plain, Thick, Color, Recycled, Pre-punched, Bond, Envelope

Stack bypass: Thin, Plain, Thick, Color, Recycled, Pre-punched, Transparencies, Label, Bond, Envelope

Cassette 2 (CASSETTE FEEDING UNIT-AJ1): Thin, Plain, Thick, Color, Recycled, Pre-punched, Bond

Cassettes (CASSETTE MODULE-AE1): Thin, Plain, Thick, Color, Recycled, Pre-punched, Bond

Cassette 2/3/4 (Cassette Feeding Unit-AK1): Thin, Plain, Thick, Color, Recycled, Pre-punched, Bond

Supported Media Sizes

Cassette 1

Standard size: Legal, Letter, Executive, Statement, A4, B5, A5, Envelopes

Custom Size: 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 mm x 190.5 mm to 216 mm x 355.6 mm)

Cassette 2 (Cassette Feeding Unit-AJ1/Cassette Module-AE1)

Standard size: Legal, Letter, Executive, Statement, A4, B5, A5

Custom size: 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 mm x 190.5 mm to 216 mm x 355.6 mm)

Cassette 2/3/4 (Cassette Feeding Unit-AK1)

Standard size: Legal, Letter, Executive, Statement, A4, B5, A5

Custom size: 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 mm x 190.5 mm to 216 mm x 355.6 mm)

Stack bypass:

Standard size: Legal, Letter, Executive, Statement, A4, B5, A5, Envelopes

Custom Size: 3-7/8" x 5-7/8" to 8-1/2" x 14" (98 mm x 148 mm to 216 mm x 355.6 mm)

Envelope custom size: 3-7/8" x 5-7/8" to 8-1/2" x 14" (98 mm x 148 mm to 216 mm x 355.6 mm)

Supported Media Weights

Cassettes: 16 lb. Bond to 60 lb. Cover (60 to 163g/m²)

Stack bypass: 16 lb. Bond to 80 lb. Cover (60 to 220g/m²)

Duplex: 16 lb. Bond to 60 lb. Cover (60 to 163g/m²)

Warm-up Time

*From Power On:

30 Seconds or Less (iR-ADV C355iF), 34 Seconds or Less (iR-ADV C255iF)

*Time between device power-on and when the start key is enabled. Quick startup Mode ON

10 Seconds or Less

From Deep Sleep Mode:

Quick Startup Mode:

4 Seconds or Less*

*Time until key operation can be performed on the touch panel display

Dimensions (W x D x H)

Standard (Desktop): 20-1/8" x 25-5/8" x 25-1/8" (511 mm x 651 mm x 639 mm)

With Cassette Feeding Unit-AJ1 or -AK1: 20-1/8" x 25-1/8" x 41-9/10" (511 mm x 651 mm x 1,064 mm)

Installation Space(W x D)

Basic: 33-1/2" x 35-3/4" (852 mm x 908 mm) (Stack bypass open + Cassette Drawers open)

Fully Configured: 55-3/8" x 35-3/4" (1,407 mm x 908 mm) (when attach with Staple Finisher-Z1 + Stack bypass open + Cassette Drawers open)

Weight⁵

Standard (Desktop): Approx. 108 lb. (49 kg)

With Cassette Feeding Unit-AJ1:	Approx. 143.3 lb. (65 kg)
With Cassette Module-AE1:	Approx. 130.1 lb. (59 kg)
With Cassette Feeding Unit-AK1:	Approx. 149.9 lb. (68 kg)

Print Specifications

Printing Method

Color laser beam printing

Print Speed

iR-ADV C355iF 36 ppm (Letter)
29 ppm (Legal)
35 ppm (A4)

iR-ADV C255iF 26 ppm (Letter)
21 ppm (Legal)
25 ppm (A4)

Print Resolution*

9,600 dpi equivalent x 600 dpi (600 dpi mode), 1200 dpi x 1200 dpi equivalent (1200dpi mode)*Laser Resolution

Page Description Languages

UFR II, PCL6, Adobe PS 3

Double Sided Printing

Automatic (Standard)

Direct Print

Direct printing available from USB memory key, Advanced box, Remote UI and Web Access®
Supported File Types: PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile and Cloud

A range of software and MEAP-based solutions is available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese),* Barcode fonts*

PS fonts: 136 Roman

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Page Border, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/Orientations, Offsetting, Printing on Transparencies, Front/Back Covers, Toner Reduction, Poster Printing

Operating System¹⁰

UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later)
PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10
PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MAC OS X (10.6.8 or later)
PPD: MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/Windows 8/Windows 8.1/Windows 10

Copy Specifications

Copy Speed

iR-ADV C355iF: 36 ppm (Letter), 29 ppm (Legal), 35 ppm (A4)

iR-ADV C255iF: 26 ppm (Letter), 21 ppm (Legal), 25 ppm (A4)

*First-Copy-Out Time (Letter) (BW/CL)

iR-ADV C355iF: Approx. 5.1/6.9 seconds or less
*: 20 °C to 30 °C Environment

iR-ADV C255iF: Approx. 6.9/9.4 seconds or less

Copy Resolution

Reading: 600 dpi x 600 dpi

Multiple Copies

Up to 999 copies

Copy Exposure

Automatic or Manual (inch 9 Levels, A/B 11 Levels)

Magnification

25% - 400% (1% Increments)

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper Setting, Previous Settings, Favorite Settings, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Tranceparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Store in Mail Box, Superimpose Image, Cascade Copy, Copy ID Card, Detect Feeder Multi Sheet Feed, Free Size Original

Scan Specifications

Type

Single-pass Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

100 Sheets (20 lb. Bond, 80 g/m²)

Document Feeder Supported Media Sizes

Legal, Letter, Statement, A4, A5, A6, B5

Document Feeder Supported Media Weights

Single-sided scanning: 50 to 128 g/m² (BW)

Single-sided scanning: 64 to 128 g/m² (CL)

Double-sided scanning: 50 to 128 g/m² (BW)

Double-sided scanning: 64 to 128 g/m² (CL)

Pull Scan Spec

Color Network ScanGear2, For both Twain and WIA

Supported OS: Windows Vista/7/8/8.1/10
Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2

Scan Resolution

Max. 600 x 600 dpi

Min. 100 x 100 dpi

Platen Acceptable Originals

Platen: Sheet, Book, 3-Dimensional Objects

Paper size: A4, A5, A6, B5

Scan Method

Send functionality available on all models

Scan to USB Memory Available on all models

Key:

Scan to Mobiles or internet-connected devices: A range of solutions is available to provide scanning to mobile devices or internet-connected devices depending on your requirements. Please contact your sales representative for further information.

Scan to cloud-based services: A range of solutions is available to provide scanning to cloud-based services depending on your requirements. Please contact your sales representative for further information.

TWAIN/WIA Pull scanning available on all models

Scan Speed (Letter)

Single-sided Scanning 50 ipm (300 dpi)

(BW):

Single-sided Scanning 50 ipm (300 dpi)

(Color):

Double-sided Scanning 100 ipm (300 dpi)

(BW):

Double-sided Scanning 100 ipm (300 dpi)

(Color):

Send Specifications

Optional/ standard

Standard on all models

Destination

E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 FAX, IP Fax(Optional)

Color Mode

Automatic-Color Select (Full Color/Grayscale), Automatic-Color Select(Full Color/Black-and-White), Full color, Grayscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution

Max. 600 x 600 dpi

Min. 100 x 100 dpi

Communication Protocol

File: FTP, SMB v3.0 , WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF(Compact, Apply policy, Optimize for Web, PDF A/1-b), XPS(Compact, Searchable)

Optional: PDF(Searchable, Trace&Smooth, Encrypted), PDF/XPS(Digital Signature), XPS(Searchable), Office Open XML (PowerPoint®, Word)

Fax Specifications

Maximum Number of Connection Lines

2

Modem Speed

Super G3: 33.6 kbps

G3: 14.4 kbps

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

A/B: A4, B5*, A5* and A6*

*Sent as A4

LTR: Statement to LGL

FAX Memory

Up to 30,000 pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 dials

Sequential Broadcast

Max. 256 addresses

Memory Backup

Yes

Store Specifications

Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV

Supported Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space

Approx. 16GB (Standard HDD)

Advanced Box Features:

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB Memory

Security Specifications

Authentication

Standard: Picture Login Authentication, DepartmentID Authentication, (Device and Function Level Log-in), Access Management System

Optional: My Print Anywhere secure print (Requires uniFLOW)

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS 140-2 Validated)

Optional: IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Document

Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional: Encrypted PDF, Encrypted Secure Print, User and Device signatures, Secure Watermarks, Document Scan locking

Environmental Specifications

Operating Environment

Temperature: 10 to 30 °C (50 to 86 °F)

Humidity: 20 to 80 % RH (no condensation)

Power Requirements

120-127 V, 60Hz, 6.9A

220-240 V, 50/60 Hz, 3.9 A

Plug (Main Unit)

NEMA 5-15P (120V)

CEE7/7 (230V)

Power Consumption

Maximum: 1.5 kW

Standby: Approx. 38.9W* (120V), 40.3W* (230V)
* Reference Value

Sleep mode: Approx. 0.8W¹¹

Typical Electricity Consumption (TEC) rating

iR-ADV 1.2 kWh(120V), 1.3 kWh(230V)

C355iF:

iR-ADV 0.8 kWh(120V), 0.7 kWh(230V)

C255iF:

Standards

ENERGY STAR® Qualified

Rated EPEAT®Silver³

Consumables

Toner

GPR-51 TONER BK/C/M/Y

Toner Yield (Estimated @5% Coverage)

Black: 19,000 Images

Color(C,M,Y): 21,500 Images

Software and Printer Management

Remote management tools

iW Management Console:	Server-based software for centralized management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)
eMaintenance:	Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)
Content Delivery System:	Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control.

Scanning software

Network ScanGear:	TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device.
-------------------	--

Optimization tools

Canon Driver Configuration Tool:	A utility for changing the factory default settings of Canon print drivers (Available via service only)
NetSpot Device Installer:	Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.

Platform

MEAP (Multifunction Embedded Application Platform):	A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device.
MEAP Web:	Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services

Document Publishing

IW Desktop:	Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorization.
-------------	--

Paper Size:	Legal, Letter, Executive, Statement, A4, B5, A5, and Custom Size 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 x 190.5 to 216 x 355.6 mm)
Paper Weight:	16 lb. Bond to 60 lb. Cover (60 to 163g/m ²)
Power Source:	From the Main Unit
Dimensions* (W x D x H):	20-1/8" x 20" x 16-3/4" (511 mm x 508 mm x 425 mm) *When attached with the Main Unit
Weight:	Approx. 35.3 lb. (16 kg)
Name:	Cassette Module-AE1
Paper Capacity:	550 Sheets (20lb. Bond (80g/m ²))
Paper Size:	Legal, Letter, Executive, Statement, A4, B5, A5, and Custom Size 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 x 190.5 to 216 x 355.6 mm)
Paper Weight:	16 lb. Bond to 60 lb. Cover (60 to 163g/m ²)
Power Source:	From the Main Unit
Dimensions* (W x D x H):	20-1/8" x 20" x 6-1/4" (511 mm x 508 mm x 159 mm) *When attached with the Main Unit
Weight:	Approx. 22.0 lb. (10 kg)
Name:	Cassette Feeding Unit-AK1
Paper Capacity:	1,650 sheets (550 sheets x 3) (20lb. Bond (80g/m ²))
Paper Size:	Legal, Letter, Executive, Statement, A4, B5, A5, and Custom Size 3-7/8" x 7-1/2" to 8-1/2" x 14" (98 x 190.5 to 216 x 355.6 mm)
Paper Weight:	16 lb. Bond to 60 lb. Cover (60 to 163g/m ²)
Power Source:	From the Main Unit
Dimensions* (W x D x H):	20-1/8" x 20" x 16-3/4" (511 mm x 508 mm x 425 mm) *When attached with the Main Unit
Weight:	Approx. 41.9 lb. (19 kg)

Output options

STAPLE FINISHER

Name:	Staple Finisher-Z1 (External)
Number of Trays:	1
Tray Capacity:	500 sheets (20lb. Bond (80g/m ²))
Paper Weight:	16 lb. Bond to 80 lb. Cover (60 to 220g/m ²)
Staple Position:	Corner
Staple Capacity**:	30 sheets (Up to 28 lb. Bond (105g/m ²)) **including 2 cover paper (220g/m ²)
Dimensions* (W x D x H):	21-7/8" x 18-1/8" x 11-7/8" (555 mm x 459 mm x 301 mm) *When attached with the Main Unit
Weight:	Approx. 30.9 lb (14 kg)

Hardware Accessories

Card Readers

Micard Plus Proximity Card Reader
Copy Card Reader-F1
Copy Card Reader Attachment-B5

Security Options

Document Security

Document Scan Lock Kit-B1
Secure Watermark-B1
Encrypted Secure Print Software-D1

System and Controller options

Print Accessories

PCL International Font Set-A1

Barcode Printing

Barcode Printing Kit-D1

FAX Accessories

Super G3 2nd Line Fax Board-AT1
IP Fax Expansion Kit-B1

Other Options

Accessibility Accessories

ADF Access Handle-A1

Consumables

Staple-P1

Footnotes

- 1 Subscription to a third-party cloud service required. Subject to third-party cloud service providers' terms and conditions.
- 2 Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Nothing herein should be construed as legal or regulatory advice concerning applicable laws; customers must have their own qualified counsel determine the feasibility of a solution as it relates to regulatory and statutory compliance.
- 3 For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net. 120V Only
- 4 Time from device power-on to when copy jobs can be programmed.
- 5 Includes consumables.
- 6 PDF print from Web sites is supported.
- 7 Requires the optional PCL International Font Set-A1.
- 8 Requires the optional Barcode Printer Kit-D1.
- 9 Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- 10 0.8 W sleep mode not available in all circumstances due to certain settings.

Paper Supply Option

PAPER SUPPLYING UNIT

Name:	Cassette Feeding Unit-AJ1
Paper Capacity:	550 Sheets (20lb. Bond (80g/m ²))

www.cla.canon.com/imageRUNNER_ADV_Series

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, imageWARE, MEAP, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. iF Design Award 2017 is for third generation imageRUNNER ADVANCE Multifunction office systems. Google Cloud Print™ is either a registered trademark or trademark of Google Inc. AirPrint and the AirPrint logo are trademarks of Apple Inc. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.

©2017 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

0207W504



Canon

Canon U.S.A., Inc. - Latin America Group
One Canon Park
Melville, NY 11747
U.S.A.

